


Merica Series-MPA50

Probe

MPA-50-H-4G




Technical Specifications

Recommended	
Minimum Center	:1.27(50mil)
Current Rating	:3amps, continuous
Contact Resistance	:60milliohms
Full Stroke	:6.35mm
Rated Stroke	:4.30mm
Spring Force	:122gf(4 oz)

Materials









Receptacle	:Bross, Gold Plated
Contact Barrel	:Bronze, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated or Gold Plated

Receptacle

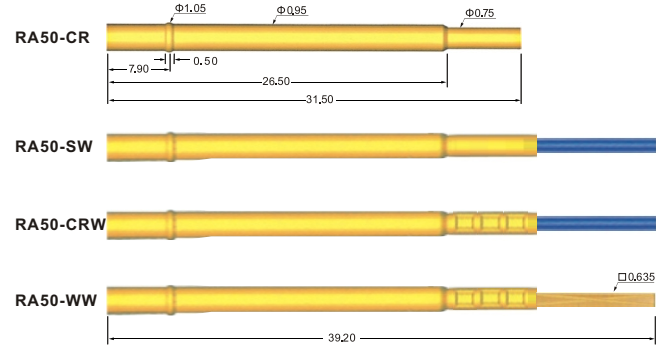

Tip Styles

Test Centers-50mil(1.27mm)



How To Order: Spring Contact Probe

MPA50 — **H** — **4** — **G**
 Series Tip Style Spring Force (oz) Plating Options [G-Gold Plated]

Series: **MPA50**
 Tip Style: B, K5, J, U3, U, IT
 Spring Force: 4 oz