


Merica Series-MPAL50

Probe

MPAL-50-H-7G




Technical Specifications

Recommended	
Minimum Center	:1.27(50mil)
Current Rating	:3amps, continuous
Contact Resistance	:60milliohms
Full Stroke	:6.35mm
Rated Stroke	:4.30mm
Spring Force	:185/227gf(7/8 oz)

Materials








Receptacle	:Bross, Gold Plated
Contact Barrel	:Bronze, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated or Gold Plated

Receptacle

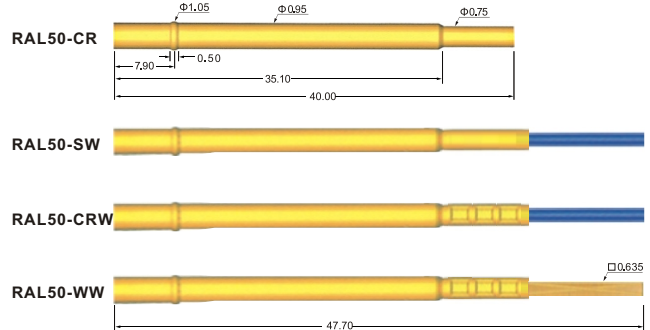

Tip Styles

Test Centers-50mil(1.27mm)



How To Order: Spring Contact Probe

MPAL50 **H** **7** **G**
 Series Tip Style Spring Force (oz) Plating Options [G-Gold Plated]

Series: **MPAL50**
 Tip Style: B, K5, J, U3, U, IT
 Spring Force: 7 oz