


Merica Series-MP125

Probe

MP125-F-9G




Technical Specifications

Recommended Minimum Center	:3.18mm(125mil)
Current Rating	:5amps, continuous
Contact Resistance	:30milliohms
Mounting Holes Size	:Φ2.40
Full Stroke	:6.35mm
Rated Stroke	:4.32mm
Spring Force	:113/198/255gf(4/7/9 oz)

Materials


Receptacle	:Bronze, Gold Plated
Contact Barrel	:Bronze, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated or Gold Plated

Receptacle

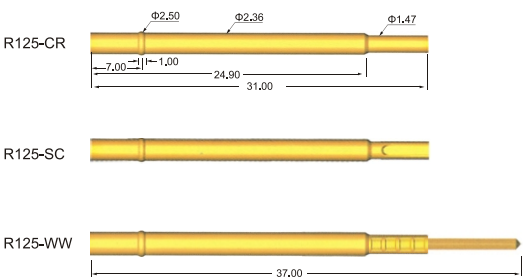

Tip Styles

Test Centers–125mil(3.18mm)



MP125-H5




MP125-Z




MP125-X




MP125-V



MP125-H17




MP125-U5



MP125-U3




MP125-U



MP125-A




MP125-B



MP125-C




MP125-D



MP125-E



MP125-F



MP125-G



MP125-H




MP125-J



MP125-K



MP125-LM



MP125-VH



MP125-T



MP125-T17

How To Order:Spring Contact Probe				Receptacle	
MP125	F	9	G	R125	WW
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations
Series: MP125 Tip Style: B, J, U5, U Spring Force: 9 oz				Terminations: WW	