


Merica Series-MPL50

Probe

MPL50-F-3G




Technical Specifications

Recommended Minimum Center	: 1.27mm(50mil)
Current Rating	: 3 amps,continuous
Contact Resistance	: 50 milliohms
Mounting Holes Size	: ϕ 0.95mm
Rated Stroke	: 2.54mm
Spring Force	: 85g(3.0oz)

Materials


Receptacle	: Brass, Gold Plated
Contact Barrel	: Bronze, Gold Plated
Spring	: Music Wire, Gold Plated
Plunger	: BeCu or Steel, Rhodium Plated or Gold Plated

Receptacle

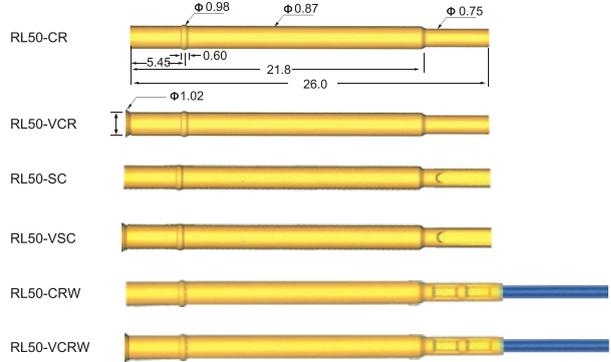

Tip Styles

Test Centers—50mil(1.27mm)

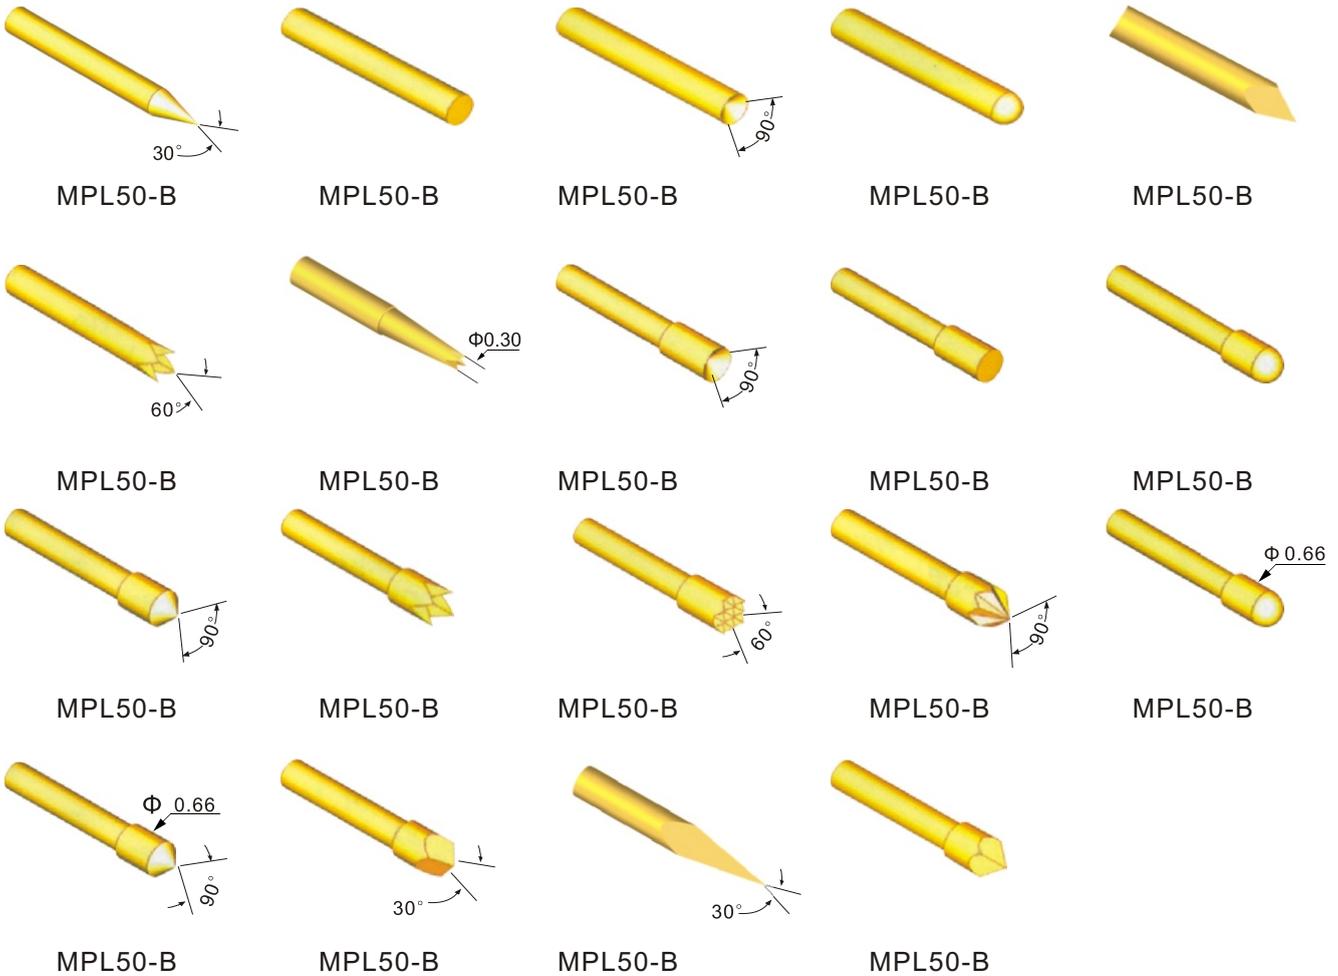

How To Order: Spring Contact Probe				Receptacle	
MPL50	F	3	G	MPL50	CR
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations
Series	: MPL50				
Tip Style	: B,C,G,J				
Spring Force	: 3oz				