MERICA ICT PROBES

Merica Series-MPL75

Probe

MPL75-F-4G



Technical Specifications

Recommended		
Minimum Center	:	1.91mm(75mil)
Current Rating	:	3 amps,continuous
Contact Resistance	:	50 milliohms
Mounting Holes Size	:	Φ 1.35mm
Rated Stroke	:	2.54mm
Spring Force		113g(4.0oz)

Materials

Receptacle	:	Brass,Gold Plated
Contact Barrel	:	Brass,Gold Plated
Spring	:	Music Wire,Gold Plated
Plunger	:	BeCu or Steel,Rhodium Plated or Gold Plated

Receptacle

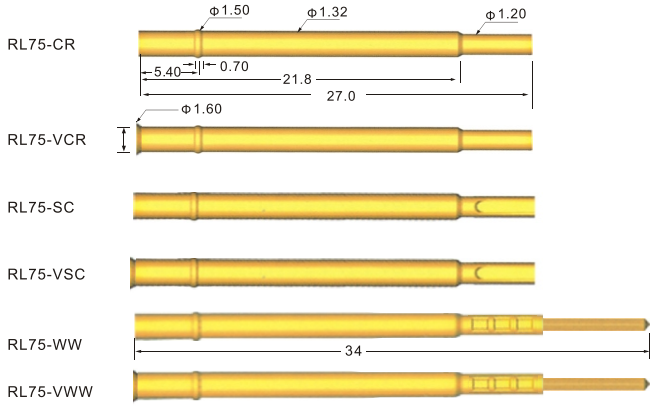

Tip Styles

Test Centers–75 mil(1.91mm)



MPL75-B

MPL75-C



MPL75-G

MPL75-J

MPL75-T6



MPL75-U



MPL75-U3



MPL75-A

MPL75-F



MPL75-D



MPL75-E



MPL75-V



MPL75-H



MPL75-LM



MPL75-H12



MPL75-LM12



MPL75-T



MPL75-K6



MPL75-K



MPL75-H6



MPL75-T12

How To Order:Spring Contact Probe				Receptacle	
MPL75	F	4	G	RL75	CR
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations

Series : **MPL75**
Tip Style : B,G,C,J
Spring Force : 4oz